
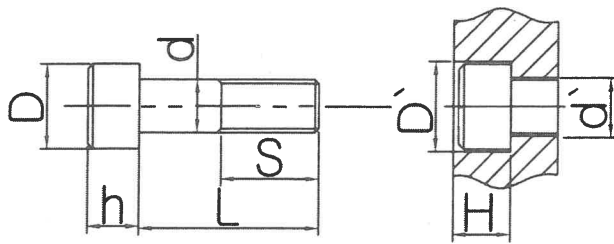


6각구멍볼이 볼트의 설계 치수



(단위 : mm)

나사호칭	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20
P(피치)	0.5	0.7	0.8	1.0	1.25	1.5	1.75	2	2	2.5	2.5
d	3	4	5	6	8	10	12	14	16	18	20
D	5.5	7	8.5	10	13	16	18	21	24	27	30
h	3	4	5	6	8	10	12	14	16	18	20
d'	3.4	4.5	5.5	6.5	9	11	14	16	18	20	22
D'	6.5	8	9.5	11	14	17.5	20	23	26	29	32
H	3.5	4.5	5.5	7	9	11	13	15	17	20	22
S	12	14	16	18	22	26	30	34 40	38 44	42 48	46 52
L	4	4	8	10	12	14	20	20	25	30	35
	5	5	10	12	14	16	25	25	30	35	40
	6	6	12	14	16	20	30	30	35	40	45
	8	8	14	16	20	25	35	35	40	45	50
	10	10	16	20	25	30	40	40	45	50	55
	12	12	20	25	30	35	45	45	50	55	60
	14	14	25	30	35	40	50	50	55	60	65
	16	16	30	35	40	45	55	55	60	65	70
	20	20		40	45	50	60	60	65	70	75
		25		45	50	55	65	65	70	75	80
				50	55	60	70	70	75	80	85
					60	65	75	75	80	85	90
					65	70	80	80	85	90	100
					70	75	85	85	90	100	110
					75	80	90	90	100	110	120
					80	85	100	100	110	120	130
					85	90	110	110	120	130	140
					90	100	120	120	130	140	150
					100	110		130	140	150	160
						120		140	150	160	170
								150	160	170	180
B	2.5	3	4	5	6	8	10	12	14	14	17